


Gas Analyzer



5.0 H2 Purity ANALYZER

Ensuring Quality and Safety,
in the renewable Energy Market

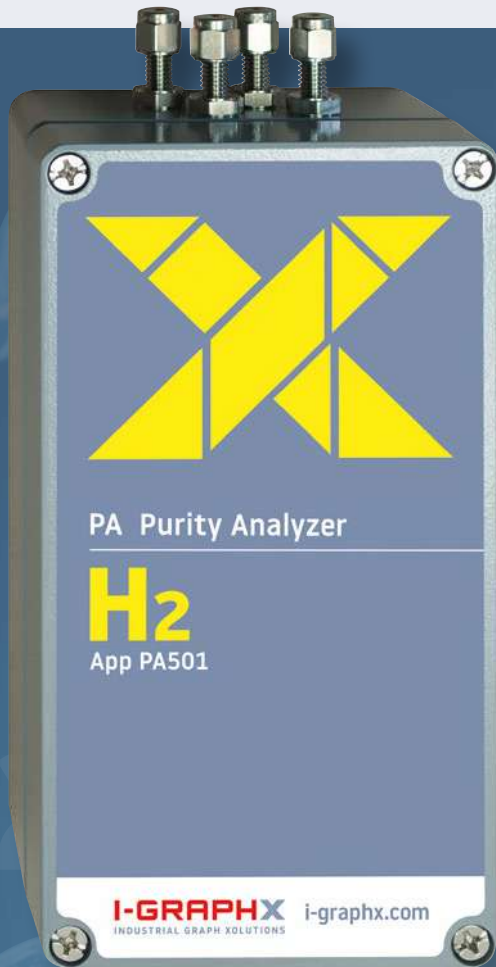

ATEX solution available

Purity Grade: **99.999 %**

Pollution Sensitivity: **10 ppm**

Small, Fast, Online: **< 10 sec.**


Data exchange: **MODBUS, 20 mA**

More Products: Micro gas chromatography | H2 analyzers | Micro dosing | Electronic pressure control units | Accesories

***Biomass / Renewable Energy / Storage / Electrolysis /
Pyrolysis / FuelCell / Carbon capturing / Syngas /
Synthesis / E-Fuels / Methanol***

We reserve the right to make changes to technical data, dimensions, weights, construction and products. The illustrations are non-binding and show any special equipment.



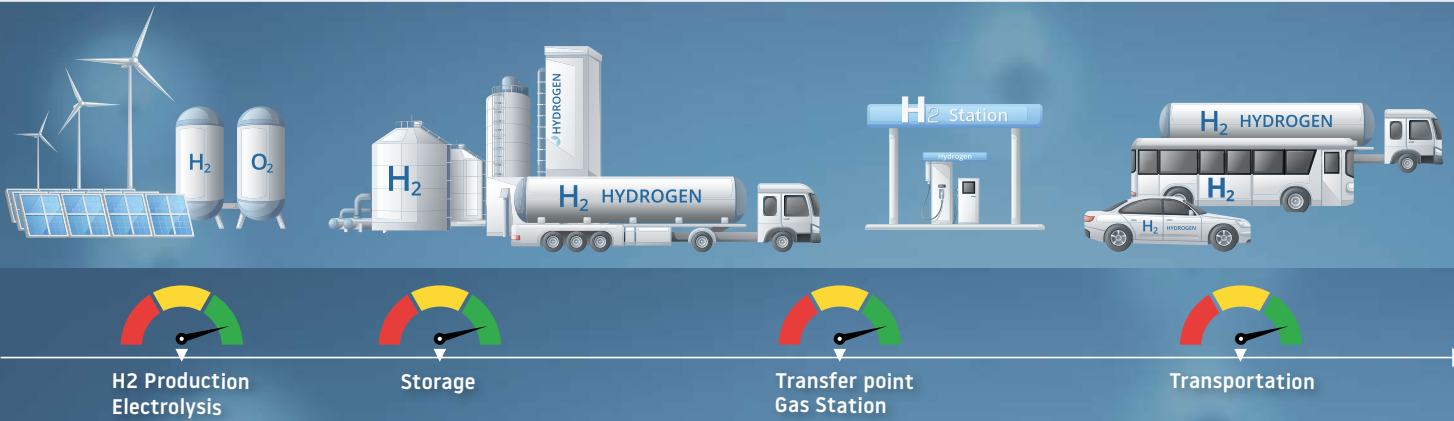

Knowing is better than guessing
H2 Quality assurance with I-GRAPHX
Purity Analyzer



Hydrogen purity measurement – measuring the smallest impurities very easily

The **PA Purity Analyzer** measures hydrogen contamination in ppm-Range quickly and easily up to a gas purity of **99.999% (Grade 5.0)**.

On the way to greenhouse gas neutrality, the energy source H₂ will play an important role in the future. The exact determination of the hydrogen quality therefore plays a major role in many areas of industry as many machines, engines and industrial applications require a high degree of purity of the sustainable energy carrier H₂. So far, **precise online measurement of hydrogen purity** has only been possible with highly complex analytical methods, or time-consuming samples have to be sent to laboratories for analysis. An economical, fast, precise and comprehensive recording of the H₂ quality was not possible until now.

Our **Purity Analyzer PA**, which can be used universally in all production processes, transfer and filling stations related to hydrogen makes affordable precise **H₂ online Analyzing** possible by now. The measuring section used in the **PA** is an in-house development of **I-GRAPHX GmbH**. Like all our analysis systems, it is manufactured using **MEMS technology**. This special structure enables fast and high-precision continuous measurement of the H₂ quality. The miniaturization and use of the analytical connection technology enable the problem-free use of the **PA Analyzer** for the very volatile hydrogen.

Optionally, the **PA Analyzer** can also be used for other high-purity gases such as **Helium** in order to carry out quick measurements of the total contamination.

Properties:

- Accurate and long-term stable analysis
- Monitoring of continuous processes
- Very fast H₂ detection
- Low operating costs, minimal maintenance

Technical data:

- Electronic pressure regulation
- Measurement range: 10 ppm to 100 %
- Measurement results: Vol % resolution 1 ppm
- Power supply: 24 VDC, 0.5 A
- Ambient temperature: -10 °C to +50 °C
- Accuracy: < 0.1 % v.M

Connections:

- Media: tube fitting (others on request)
- Connections: USB (internal), RS485 (Modbus RTU, GC Manager)
- Monitoring: via web server through optional HMI
- Analog OUT: 4-20 mA (1 channel)

Unit size:

- W x H x D: 220 x 120 x 90 mm
- Weight: ca. 2.5 kg

We reserve the right to make changes to technical data, dimensions, weights, construction and products. The illustrations are non-binding and show any special equipment.